Metso

Thickeners and Clarifiers

Clear performance. Sustainable profits.



Sustainable thickening and clarifying innovations

Metso is a global leader in the design, fabrication and supply of thickening and clarifying solutions. With leading process expertise and know-how based on decades of experience, Metso offers smart and sustainable solutions with unmatched performance when using our diverse and versatile product offering that consists of High Rate Thickeners, High Compression Thickeners, Paste Thickeners, Inclined Plate Settlers and Clarifiers.





Exceptional track record

Metso has been consistent in answering customer challenges and providing solutions for nearly 50 years



Sustained performance

Metso expertise covers a wide range of applications with sustainability at the forefront



Leading innovator

Metso is the global leader in the design, fabrication and supply of thickening and clarifying solutions




Sustainability is one of Metso's key strategic priorities - we are committed to limiting global warming to 1.5 °C. The thickening & clarifying solutions are a part of the recently launched Planet Positive offering, since they are designed to improve water-efficiency, lower emissions & lower amount of energy consumed.

Planet Positive is our all-encompassing approach to sustainability, which covers the environmental, social and financial aspects. Our Planet Positive offering has a central role in our sustainability agenda and 1.5 °C journey as it represents the key means of improving the resource efficiency of our customers' operations.

Our long-term goal is to provide customers with products and services that are even more sustainable. We will continuously develop our thickening and clarifying offering, with a focus on energy efficiency, reducing emissions, water efficiency, circular solutions and - of course - safety.

Product selection

Setting the industry standard in performance, Metso has an exceptional track record for innovation with a diverse portfolio of thickening and clarifying products to suit a wide range of applications.

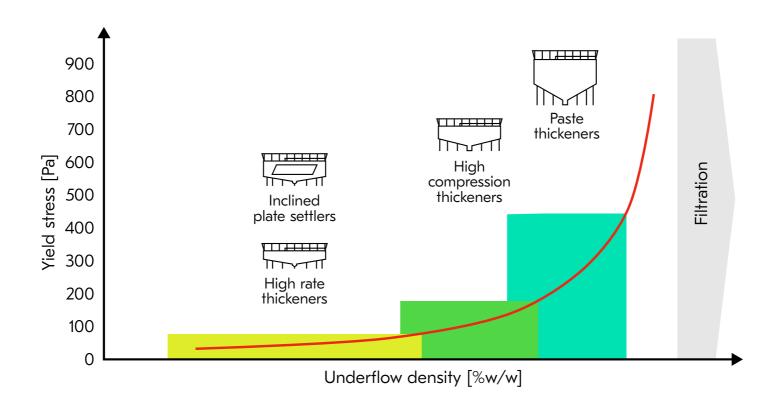

Typical applications

	Alum	ina, Ba	ayer pro	ocess	Potash		Coal		Blast furnace flue dust		ase me ncentra		Flotation tailings	lron	ore	Go	old	Copper CCD	Nickel laterite CCD	Molybdenum concentrate	Mineral sands slimes	Plati	num	Urar	nium
	Red mud clarifiers (settlers)	Red mud washers	Red mud final washers	Hydrafe		Coal failings	Clean coal fines	Dense media		Copper	Zinc/Lead	Nickel		Concentrate	Tailings	CCD	Tailings					Concentrate	Tailings	Acid leached ore	Uraniumm precipitate
Inclined Plate Settlers					•	•		•	•					•	•						•				•
High Rate Thickeners					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
High Compression Thickeners				•									•			•	•	•	•		•		•	•	
Paste Thickeners	•	•	•	•									•				•						•		

<u>High Rate Thickeners</u>

Metso High Rate Thickeners include a number of innovative features in design. Our Directional Autodil™ and Turbodil™ systems autodilute feed while optimizing performance and flocculant consumption. Our innovative Metso Reactorwell™ incorporates interconnected upper and lower zones to further improve performance.





HRT

1m - 125m Diameter

Key features

- · Delivers consistent and high-density underflow
- Uses flocculation chemistry to increase settling rates
- Maximizing life cycle profitability through our patented feedwell technology
- Automated operation, suitable to advanced control systems
- Tailored to the customer needs

HRT-S

3m - 10m Diameter

- Standardized design with preset diameter range
- Prescribed product application limits
- · Simplified delivery model
- Predetermined engineering scope
- Fully containerized equipment


High rate thickeners


Product portfolio


The HRT suits all applications where flocculants can be used in the process. Equipment is tailored to the customer needs.


The HRT-S is a pre-engineered range of high rate thickeners providing the same performance metrics as the HRT but with selected application range enabling accelerated project deliveries.

	HRT	HRT-S	Design factors
Diameter (m)	1 - 125	3 - 10	• Feed rate t/hr or m³/hr
Sidewall (m)	1.8 - 3.6	1.8 - 2	Solids residence time / compaction depthClarification zone depthGeometry
Floor slope	1:6	40°	 Floor slope driven by yield stress and slurry transport
K-factor	20 - 70	30 - 50	Underflow density / yield stressParticle sizeBed depth









High Compression Thickeners

The Metso HCT delivers high performance for consistent process conditions, and reacts relatively quickly to changes. The HCT operation can be automated with control based on consistent solids inventory.



HCT 1m - 65m Diameter


- Deeper bed and rotating pickets for improved dewatering
- Beneficial with compressible solids beds
- Well suited for applications where additional dewatering is required (e.g. CCD's, tailings, pre-leach)


High compression thickeners

Product portfolio


Achieve a higher density underflow with our High Compression Thickener. The HCT has been designed to suit customer needs with a deeper solids bed and higher rake torque than our High Rate Thickener or conventional thickeners.

	НСТ	Design factors
		• Feed rate t/hr or m³/hr
Diameter (m)	1 - 65	 Solids loading t/m²/hr
		 Liquid loading m³/m²/hr
		 Solids residence time / compaction depth
Sidewall (m)	4 - 6	Clarification zone depth
		• Geometry
Floor slope	1:4	 Floor slope driven by yield stress and slurry transport
		 Underflow density / yield stress
K-factor	70 - 200+	 Particle size
		• Bed depth









Paste Thickeners

The 2nd Generation PT has a high sidewall and steep floor slope. With integrated automation, it reacts to changing process conditions. The thickener utilizes control based on consistent solids inventory to achieve and maintain the required underflow density. The PT-S has a higher sidewall, with simplified approach to operation and control, with storage volume to suit plant operation.



PT 1m - 45m Diameter

- · Deeper bed for increased dewatering
- Suited where maximum gravity dewatering or higher slurry discharge yield stress is required
- SMART rakelift, rake design, rotating & static pickets and advanced control for robust management of solids transport


Paste thickeners


Product portfolio


Metso Paste Thickeners provide unmatched performance in high density separation. Achieving a solids density is one thing - doing it in a managed way is another. Metso 2nd Generation Paste Thickener provides ease of operation and reliability even in the most challenging applications. The PT-S is a pre-engineered range of paste thickeners to suit mine backfill applications, without rakelift or advanced control systems.

	PT	PT-S	Design factors
Diameter (m)	1 - 45	10 - 22 (2m increments)	 Feed rate t/hr or m³/hr Solids loading t/m²/hr Liquid loading m³/m²/hr
Sidewall (m)	5 - 12	10	Solids residence time / compaction depthClarification zone depthGeometry
Floor slope	1:1.73	1:1.73	Floor slope driven by yield stress and slurry transport
K-factor	200 - 400+	400	Underflow density / yield stressParticle sizeBed depth









<u>Clarifiers</u>

Metso has been consistent in answering customer challenges for nearly 50 years, leading the innovations of the thickener and clarifying industry (e.g. Feedwell technology).



Clarifiers 1m - 125m Diameter

- For use with or without flocculation
- Robust design well suited for mining applications
- Overflow clarity typically down to 50mg/l

Clarifiers


Product portfolio

Raked clarifier with advanced feedwell design for a wide range of mining clarification duties.

Complementary automation improves thickening and clarifying performance by controlling the key variables.

	Clarifier	Design factors
Diameter (m)	1 - 125	• Feed rate t/hr or m³/hr
Sidewall (m)	1.8 - 3.6	Solids residence time / compaction depthClarification zone depthGeometry
Floor slope	1:6	 Floor slope driven by yield stress and slurry transport
K-factor	10 - 30	Underflow density / yield stressParticle sizeBed depth











Inclined Plate Settlers

Metso's IPS offers good clarity of the overflow liquid and maximum density of the underflow solids discharge with minimum space requirements. Easy to install, relocate and adapt to process changes with a wide product offering for a range of applications, the Metso IPS offers maximum return on investment to customers.














Inclined plate settlers

Product portfolio

The IPS equipment has proven to provide maximum recovery rates and a decreased plant footprint for a wide range of applications.







LTO 15 - 500m²

LTC 440 - 5400m²

LTE 220 - 1140m²

Key features

- Small to medium flow range
- Suits slurries containing coarse particles, can be fitted with rake mechanism and rake lift
- Standardized design with modular options for extra sludge retention

Key features

- Multiple inclined plate packs in a conventional thickener tank with standard center drive rake mechanism
- Substantial reduction in TIC due to large settling area to floor area ratio

- Cylindrical or Conical tank with inclined plate packs, for high thickening performance δ extended sludge buffering
- Gives maximum clarification area from minimum floor space
- Minimize/eliminate flocculants



Thickener solutions

Optimize your Thickener performance

Metso technology and solutions that improve your Thickener performance whilst helping you reach your sustainability targets.



ReactorwellTM

A first-class feed system that maximizes thickener performance while minimizing flocculant consumption, thus bringing significant cost efficiencies.

The ReactorwellTM enables maximum thickener usage due to a higher exit symmetry, resulting in better thickener operability & improved response to process changes. It also enables improved overflow clarity with higher underflow density.



Thickener optimizer

Improve thickening performance by controlling the key variables of a thickener, including underflow density, the overflow solids content, and the thickener inventory level.

The Thickener optimizer overcomes typical thickening limitations, and combines Metso experience with a multivariable, model-based controller. The Thickener optimizer is based on our proven proprietary APC platforms.



Froth control

Metso has a versatile froth management toolbox that can effectively manage froth problems. The suite of products is packaged into different levels to match the needs of any operation, resulting in improved mineral recoveries and a lower environmental impact.

Three different levels include froth skimmer, bridge sprays, launder froth baffle, internal DA tank, froth collection box and Feedwell froth baffle.

Thickener modernizations, upgrades and retrofits Service offerings

Restore your thickener to its original condition or upgrade for increased performance.









Bridge & Mechanism

Froth Management

SCD Split Ring


Feed System

Improve performance and extend the life of equipment by upgrading your aged thickener. The thickener bridge and mechanism are often upgraded in conjunction with the entire feed system. Upgrading these mechanical elements helps you to cope with new process requirements and increased capacity.

Improve minerals recovery and minimize operating costs with our thickener froth management upgrade. The upgrade helps with froth control, particularly on concentrate thickeners, which can carry valuable minerals into the thickener overflow. Reducing or eliminating froth can save an operation millions in lost minerals per year, as well as reducing maintenance and reagent costs.

Geared slewing bearings are crucial components of the Centre Column drive and critical for the efficient operation of any Metso thickener. The SCD split ring series has been designed to meet the same capacity as the original slewing bearings, offering drastically reduced plant downtime and ensures continued operation of the thickener.

Meet plant targets in the face of higher throughput, changing ore characteristics, and new operational requirements. A Metso upgrade of your thickener feed system is tailored for changing process conditions and requirements experienced throughout the lifetime of any minerals processing plant.

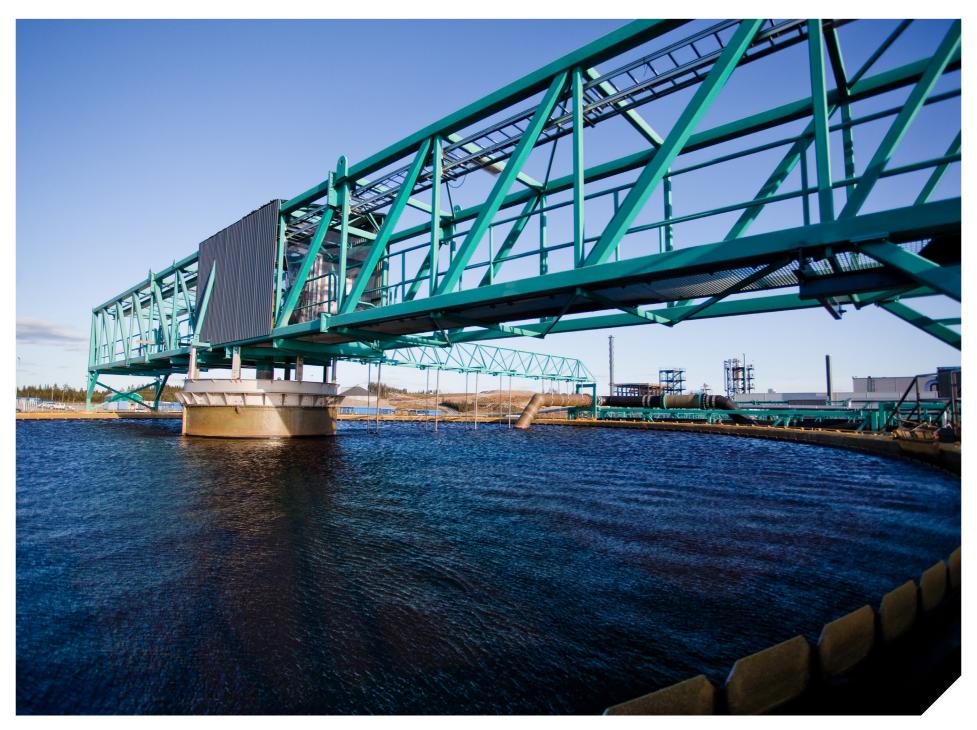

Metso is a frontrunner in providing sustainable technologies, end-to-end solutions and services for the aggregates, minerals processing and metals refining industries globally. By helping our customers increase their productivity, improve their energy and water efficiency and environmental performance with our process and product expertise, we are the partner for positive change.